
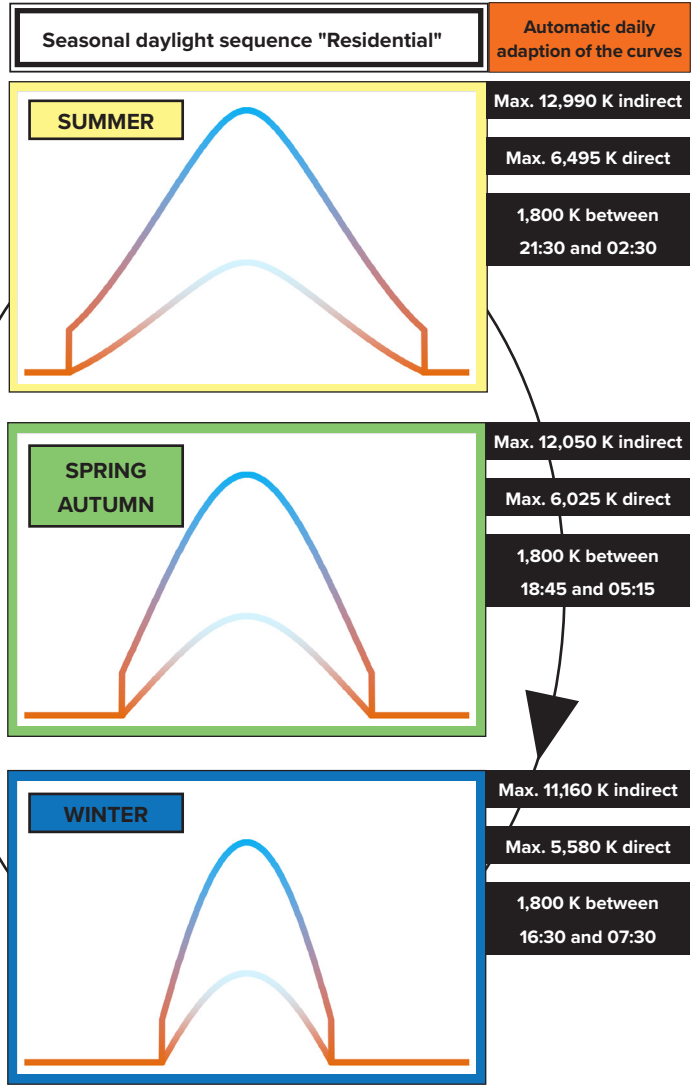


K-ZWALLY

NeoLink wall control panel
for NeoLink and ZigBee luminaires

- Luminaires can be switched on and off (optionally: power switch for luminaires and K-ZWALLY)
- Brightness (1%–100%), colour temperatures (1,800 K–16,000 K) and colours can be adjusted steplessly
- Separate control of direct and indirect light parts
- Installation and reset of a NeoLink network
- Integration in a higher-ranking NeoLink network (starting from a NeoLink Box, NeoLink USB Stick or an Amazon Echo Plus device) is possible
- Flush mounted in conventional wall sockets with a minimum depth of 61 mm
- HCL mode "automatic daylight sequence", also under consideration of direct and indirect light parts

NEW feature

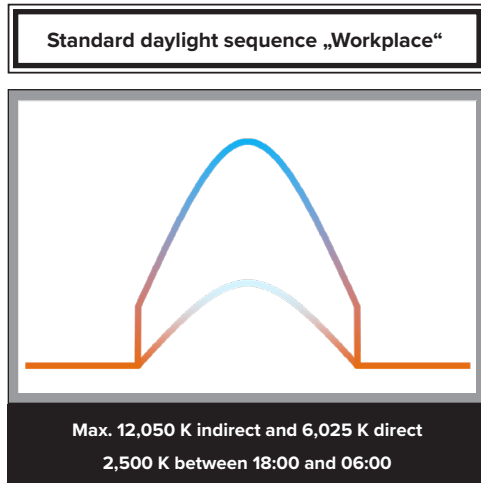

NEW feature

The new "Residential" Wally contains a night lowering:
If the Wally-controlled light is switched on between 23:30 and 05:00, the dimming level is automatically set to 5% and 1,800 K. This applies if either the light is switched on directly by the Wally or the light AND the Wally are together turned on by a switch.

TECHNICAL DATA

Operation	Endless control potentiometer with push button
Operating voltage	100 V – 240 VAC
Frequency range	50/60 Hz
Power consumption	0.3 W
Housing colour	Black
Connection / Installation	platinum terminal / flush-mounted in wall socket in accordance with DIN 49073 with a minimum depth of 61 mm
Pin diameter	4 mm (compatible with popular switch programs – countries on request); including adapter sleeve for 6 mm shaft diameter
Tests / approvals	CE / RoHs Conformity
Other	Installation and operating instructions are included at the time of delivery. The cover frame is not included (optional accessory).

ORDER DATA

Art.No.	Wally*
K-ZWALLY-1.2	Wally UTC / Workplace / NeoLink-ZigBee
K-ZWALLY-2.2	Wally UTC / Residential / NeoLink-ZigBee
K-ZWALLY-3.2	Wally UTC+1 / Workplace / NeoLink-ZigBee
K-ZWALLY-4.2	Wally UTC+1 / Residential / NeoLink-ZigBee
K-ZWALLY-5.2	Wally UTC+1 CH / Residential / NeoLink-ZigBee

Art.No.	Accessory
K-Z1000051	Central plate with rotary knob, JUNG A500 series, A1540 WW, alpine white
K-Z1000050	Frame one-fold, JUNG AS500 series, AS581 WW, alpine white
K-Z1000052	Frame two-fold, JUNG AS500 series, AS582 WW, alpine white

* All products can be used for controlling NeoLink or ZigBee 3.0 luminaires by KITEO.