
LUMITECH
YOUR LIGHTING SOLUTION

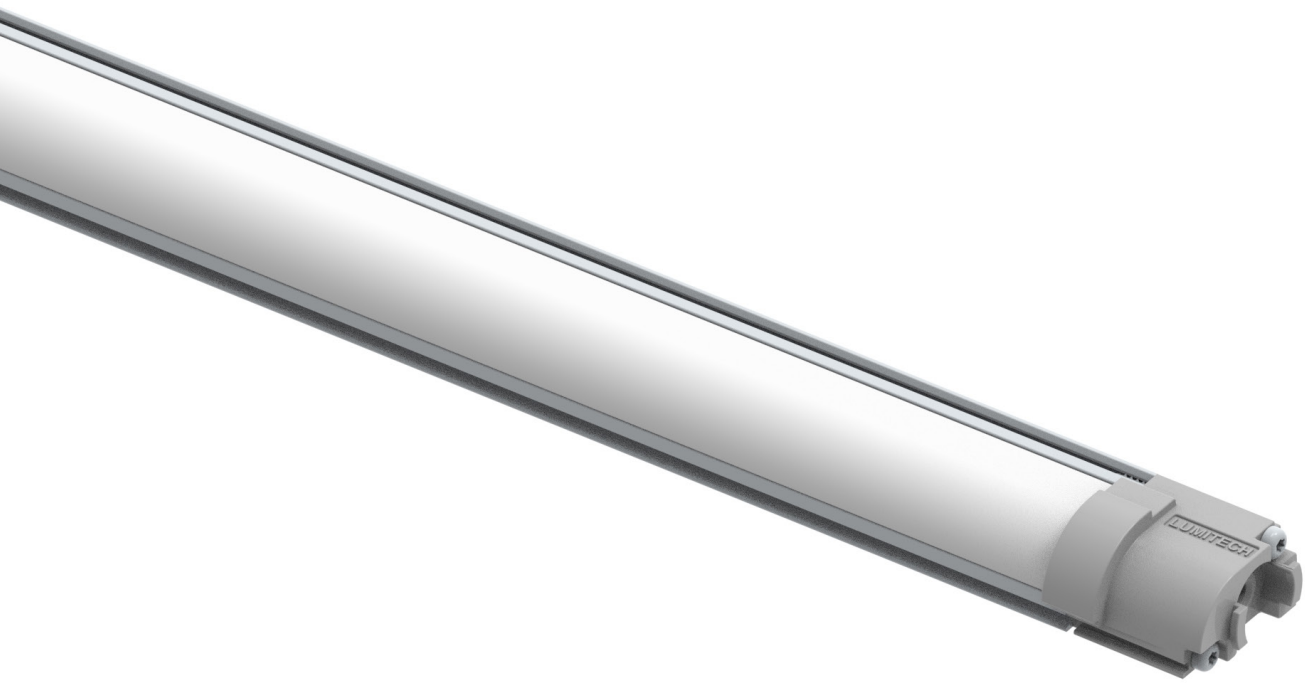


ACCESSORIES - UNIFY


© 2026-00 LUMITECH Lighting Solution GmbH | Technologiepark 10, A-8380 Jennersdorf | Tel +43 (0)3329 90 900 | office@lumitech.com | www.lumitech.com
All rights reserved. The product may differ from the photos. The technical content corresponds to the conditions valid at the time of going to press and is subject to change without notice.


ACCESSORIES - UNIFY

LED FIXING PLATE METAL UNIFY, 0°











with magnet





- Material: Stainless steel
- For horizontal applications
- Optional: with magnet

TECHNICAL DATA


Ambient temperature finally installed	-30 ... +30 °C
Ambient temperature during mounting the engine or the profile	+10 ... +30 °C
Weight	6,3g Clip | 22g Clip with magnet


ORDERING DATA


Art. Nr.	Type
88167432	LED FIXING PLATE METAL UNIFY, 0°
88167448	LED MAGNETIC PLATE METAL 0° Unify

Packaging: 50 pieces/packaging

LED FIXING PLATE METAL UNIFY, DOOR CENTER



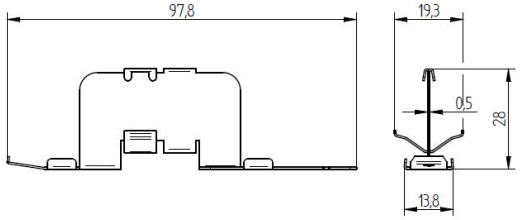

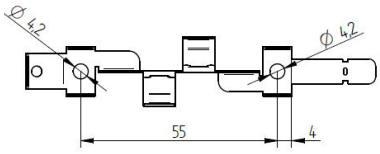

- Material: Stainless steel
- For vertical applications
- The integrated stop clip prevents the luminaire from sliding out of place
- Can be used with and without a blind

TECHNICAL DATA

Ambient temperature finally installed	-30 ... +30 °C
Ambient temperature during mounting the engine or the profile	+10 ... +30 °C
Weight	7,4g


ORDERING DATA


Art. Nr.	Type
88167434	LED FIXING PLATE METAL UNIFY, Door Center

Packaging: 50 pieces/packaging

Mounting instructions:


Installation of fixing plates:
1: Put the mounting plates in the correct position and secure them with screws.

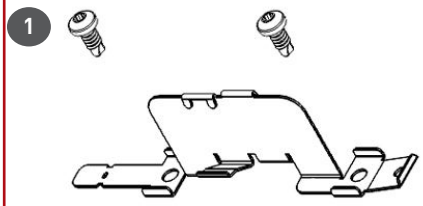

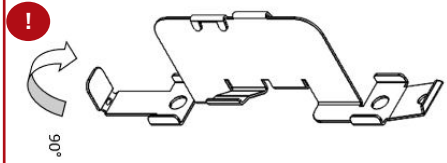

Installation of fixing plates in Unify blinds:
1: Slide the fixing plates into the provided slots.
2: For a secure fixation, press the ends of the clips upwards with a screwdriver.



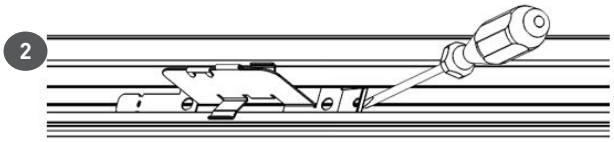


Bend the tab of the lowest part by 90° with the screwdriver, to prevent the luminaire from sliding out of place.

© 2026-00 LUMITECH Lighting Solution GmbH | Technologiepark 10, A-8380 Jennersdorf | Tel +43 (0)3329 90 900 | office@lumitech.com | www.lumitech.com
All rights reserved. The product may differ from the photos. The technical content corresponds to the conditions valid at the time of going to press and is subject to change without notice.

ACCESSORIES - UNIFY

LED FIXING PLATE METAL UNIFY, DOOR END



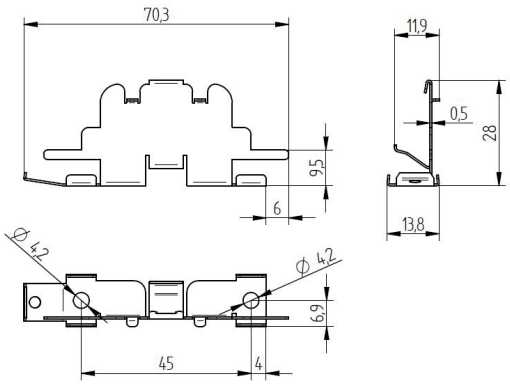

- Material: Stainless steel
- For vertical applications
- The integrated stop clip prevents the luminaire from sliding out of place
- Can be used with and without a blind

TECHNICAL DATA

Ambient temperature finally installed	-30 ... +30 °C
Ambient temperature during mounting the engine or the profile	+10 ... +30 °C
Weight	6,2g


ORDERING DATA

Art. Nr.	Type
88167435	LED FIXING PLATE METAL UNIFY, Door End


Packaging: 50 pieces/packaging

Mounting instructions:

Installation of fixing plates:
1: Put the mounting plates in the correct position and secure them with screws.

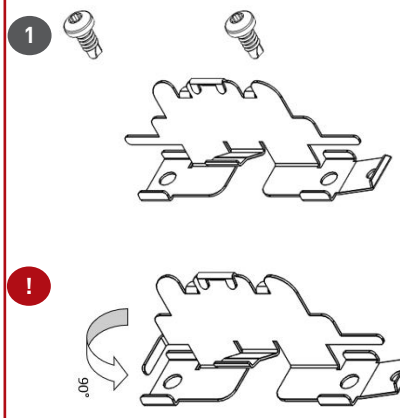

Installation of fixing plates in Unify blinds:
1: Slide the fixing plates into the provided slots.
2: For a secure fixation, press the ends of the clips upwards with a screwdriver.

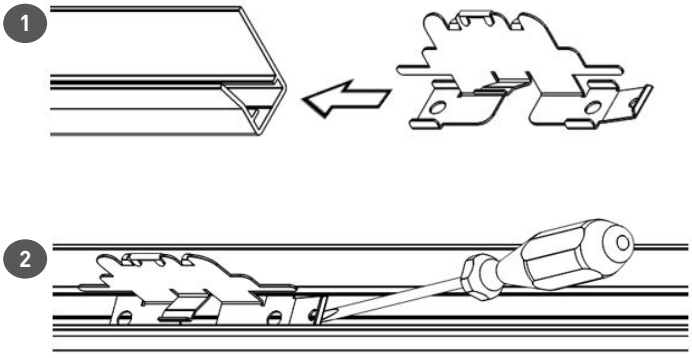



Bend the tab of the lowest part by 90° with the screwdriver, to prevent the luminaire from sliding out of place.

© 2026-00 LUMITECH Lighting Solution GmbH | Technologiepark 10, A-8380 Jennersdorf | Tel +43 (0)3329 90 900 | office@lumitech.com | www.lumitech.com
All rights reserved. The product may differ from the photos. The technical content corresponds to the conditions valid at the time of going to press and is subject to change without notice.

ACCESSORIES - UNIFY

LED MOUNTING BRACKET, UNIFY 4°





- Material: Stainless steel
- For horizontal & vertical applications
- Dimensions (LxWxH): 41 x 21,8 x 12,9mm

TECHNICAL DATA


Ambient temperature finally installed	-30 ... +30 °C
Ambient temperature during mounting the engine or the profile	+10 ... +30 °C
Weight	7g


ORDERING DATA

Art. Nr.	Type
88167452	LED FIXING PLATE METAL 4° left Unify
88167453	LED FIXING PLATE METAL 4° right Unify

Packaging: 50 pieces/packaging

MOUNTING EXTENSION FOR BLIND

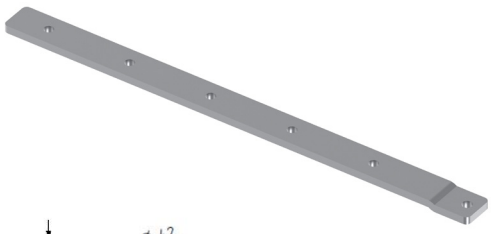

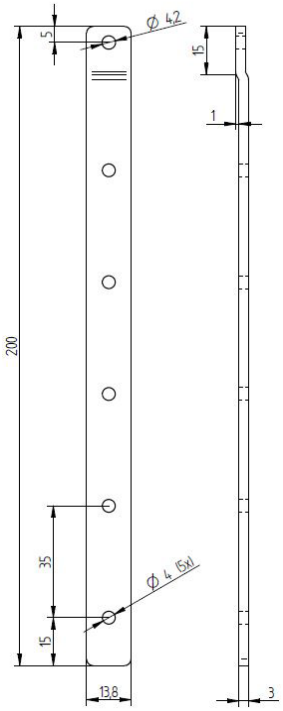

- Material: Stainless steel
- Used as extension for frameless doors (vertical lighting)
- Can only be used with a Unify blind

TECHNICAL DATA

Ambient temperature finally installed	-30 ... +30 °C
Ambient temperature during mounting the engine or the profile	+10 ... +30 °C
Weight	59g

ORDERING DATA


Art. Nr.	Type
88167436	LED FIXING PLATE METAL UNIFY, mounting extension for blind

Packaging: 50 pieces/packaging


© 2026-00 LUMITECH Lighting Solution GmbH | Technologiepark 10, A-8380 Jennersdorf | Tel +43 (0)3329 90 900 | office@lumitech.com | www.lumitech.com
All rights reserved. The product may differ from the photos. The technical content corresponds to the conditions valid at the time of going to press and is subject to change without notice.

ACCESSORIES - UNIFY

BLINDS

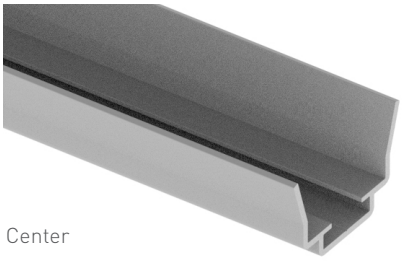

Center

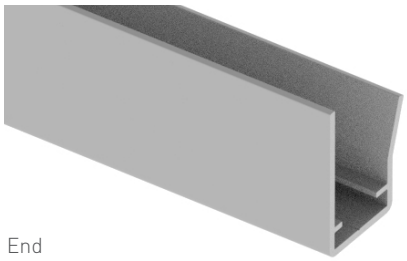

End

- Material: aluminium
- For vertical applications


TECHNICAL DATA


Ambient temperature finally installed	-30 ... +30 °C
Ambient temperature during mounting the engine or the profile	+10 ... +30 °C
Weight (Center & End)	231g/m & 225g/m

ORDERING DATA

Art. Nr.	Type
24166500	Blind Unify - Door Center, 1500mm
24166501	Blind Unify - Door End, 1500mm
24166510	Blind Unify – Door Center, 1600mm
24166511	Blind Unify - Door End, 1600mm
24166515	Blind Unify - Door Center, 1700mm
24166516	Blind Unify - Door End, 1700mm
24166521	Blind Unify - Door Center, 1900mm
24166522	Blind Unify - Door End, 1900mm

Packaging: 25 pieces/packaging

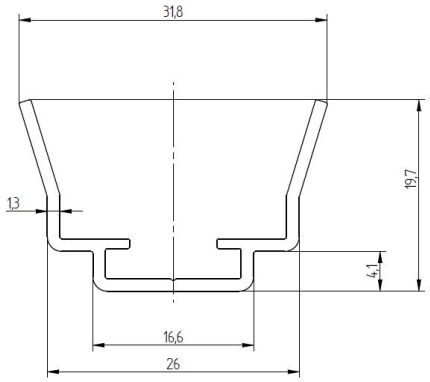


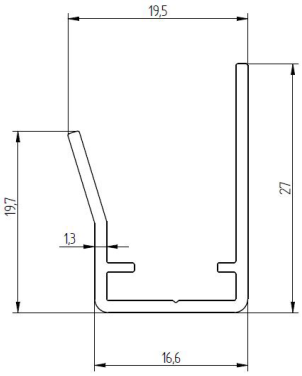

© 2026-00 LUMITECH Lighting Solution GmbH | Technologiepark 10, A-8380 Jennersdorf | Tel +43 (0)3329 90 900 | office@lumitech.com | www.lumitech.com
All rights reserved. The product may differ from the photos. The technical content corresponds to the conditions valid at the time of going to press and is subject to change without notice.

ACCESSORIES - UNIFY

L - PROFILE (1,5M)

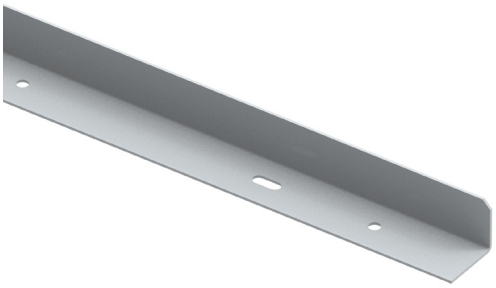

- Material: steel zinc-plated
- For horizontal & vertical applications
- Color: grey (RAL 7040), all surfaces powder coated smooth matt
- Also compatible with clips from refrigeration unit manufacturers


TECHNICAL DATA

Ambient temperature finally installed	-30 ... +30 °C
Ambient temperature during mounting the engine or the profile	+10 ... +30 °C
Weight	0,5kg

ORDERING DATA

Art. Nr.	Type
24166527	**Blind Unify - "L" profile, steel zinc-plated, RAL 7040 coated, 1500mm**


Packaging: 100 pieces/packaging

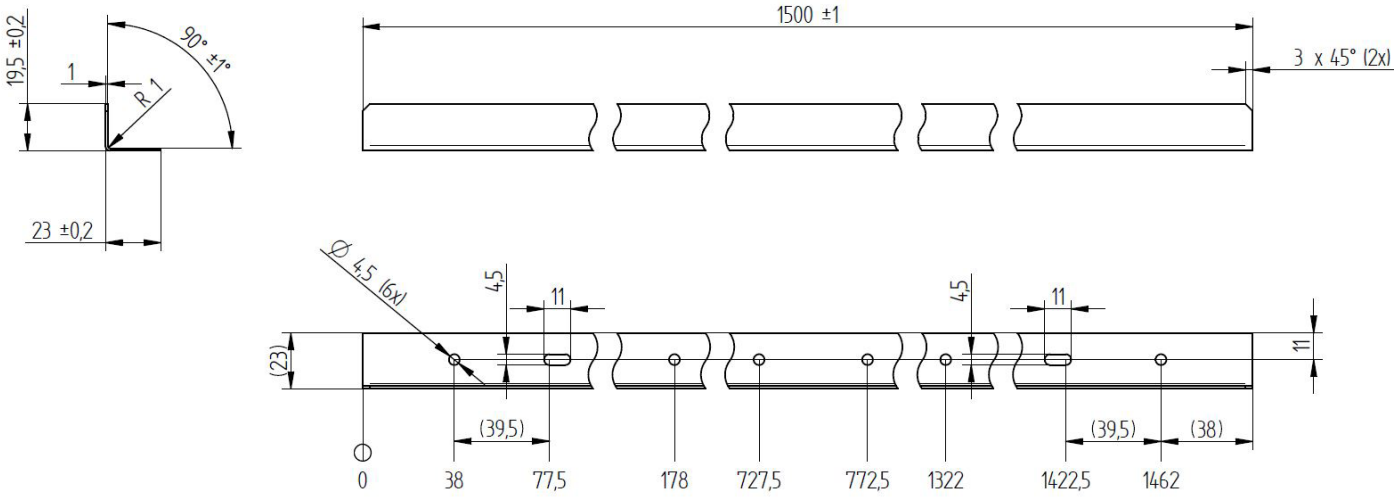

© 2026-00 LUMITECH Lighting Solution GmbH | Technologiepark 10, A-8380 Jennersdorf | Tel +43 (0)3329 90 900 | office@lumitech.com | www.lumitech.com
All rights reserved. The product may differ from the photos. The technical content corresponds to the conditions valid at the time of going to press and is subject to change without notice.

ACCESSORIES - UNIFY

STRAIN RELIEF




- Strain relief for feeder cables, 24x13mm
- The following standard is thereby fulfilled: EN 60335

ORDERING DATA

Art. Nr.	Type
24166534	STRAIN RELIEF Unify/Sense univ

Packaging: 25 pieces/packaging

PROTECTION PART - STOP CLIP



- Material: PC
- Color: grey (RAL 7035)
- Included screw: STS-plus KN6039 2x6
- GWFI > 850°C according to IEC 60695-2-12

TECHNICAL DATA


Ambient temperature finally installed	-30 ... +30 °C
Ambient temperature during mounting the engine or the profile	+10 ... +30 °C
Weight	1g



ORDERING DATA

Art. Nr.	Type
88167442	LED STOP CLIP Unify E

Packaging: 25 pieces/packaging

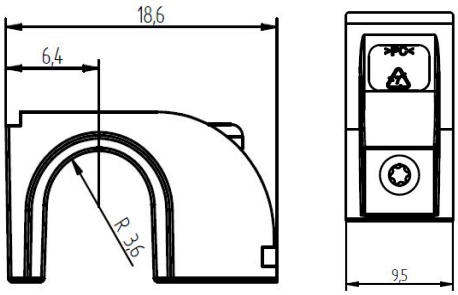

© 2026-00 LUMITECH Lighting Solution GmbH | Technologiepark 10, A-8380 Jennersdorf | Tel +43 (0)3329 90 900 | office@lumitech.com | www.lumitech.com
All rights reserved. The product may differ from the photos. The technical content corresponds to the conditions valid at the time of going to press and is subject to change without notice.